


PULSE ENERGY CAPACITORS FOR EXPLODING FOIL INITIATOR (EFI) DETONATORS

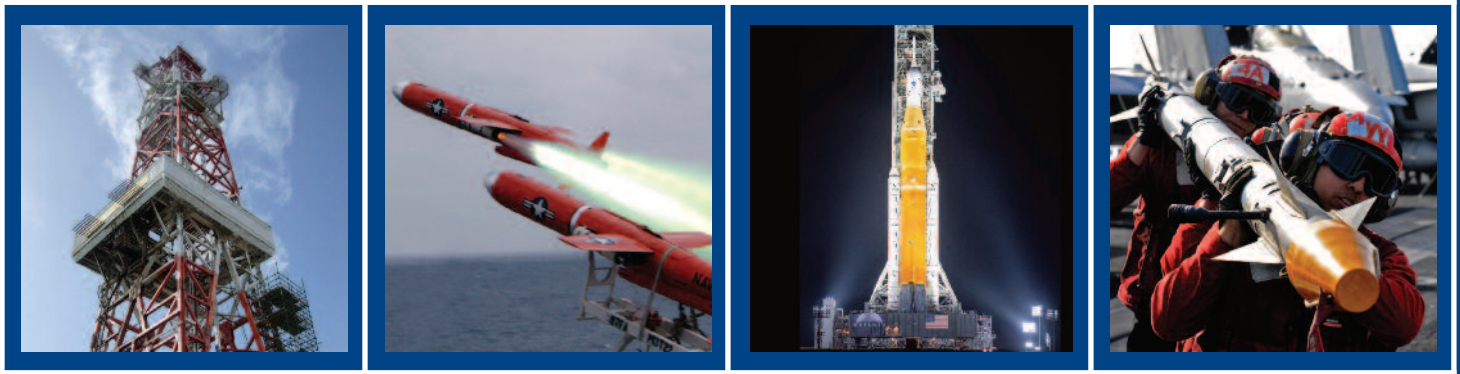

U.S. MANUFACTURER

HIGH RELIABILITY CERAMIC CAPACITORS FOR ELECTRONIC DETONATOR AND IGNITION SYSTEMS

MISSILE — DOWNHOLE — ROCKET

Available for High Temp Applications (250°C+)

Single or Multiple Pulse Firing Operations

Energy Output Designed to Your Specifications

10V to 10KVA in Multiple Dielectrics: X7R, N2T, NPO

Available with Bleed Resistors for Additional Safety



Lead Frame Options for Board Flex Compliance

Stacked Capacitors for Increased Energy Density

SOME OF OUR POPULAR SIZES INCLUDE:

Size	Capacitance	Voltage	Dielectric
3040	.10 μ F	1.8 kV	N2T
3240	.12 μ F	1.8 kV	N2T
3640	.18 μ F	1.5 kV	N2T
6560	.20 μ F	2.0 kV	N2T

Presidio's engineering team can assist you in designing the best parts for your application and energy requirements. Contact Presidio for more information about these products.

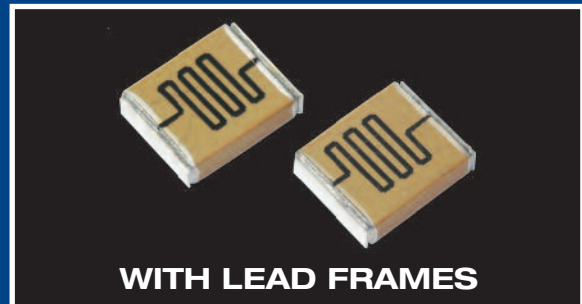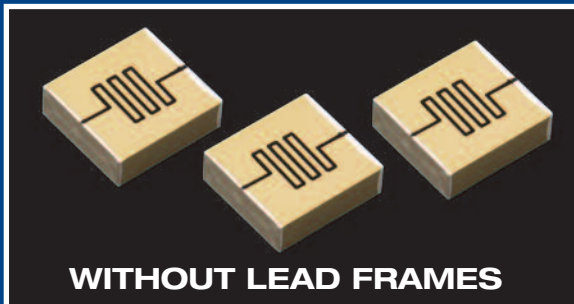

Qualified Military Supplier

MIL-PRF-123, -49467, -49470, -55681, -32535 • DLA dwgs 03028, 03029, 87xxx

MIL-STD-202 & MIL-STD-790 • DLA Approved Test Lab

Presidio Products are 100% Made in the USA • Presidio is 100% U.S. Owned

Servicing U.S. Defense Contractors for Over 40 Years