



0805 HIGH Q NPO CERAMIC CAPACITORS FOR RF & MICROWAVE

- Low ESR, High Q
- Q = 10,000 at 1 MHz
- For Use Up to Ku-Band
- 100% Made in U.S.A.
- Superior Mechanical Strength
- Suitable for Military and Space


PRESIDIO PART NUMBER	CAP. (pF)	TOL.	WVDC
0805NPO0R1_&N1N-	0.1	A,B	100, 250
0805NPO0R2_&N1N-	0.2	A,B	100, 250
0805NPO0R3_&N1N-	0.3	A,B,C	100, 250
0805NPO0R4_&N1N-	0.4	A,B,C	100, 250
0805NPO0R5_&N1N-	0.5	A,B,C	100, 250
0805NPO0R6_&N1N-	0.6	A,B,C	100, 250
0805NPO0R7_&N1N-	0.7	A,B,C	100, 250
0805NPO0R8_&N1N-	0.8	A,B,C	100, 250
0805NPO0R9_&N1N-	0.9	A,B,C	100, 250
0805NPO1R0_&N1N-	1.0	A,B,C	100, 250
0805NPO1R1_&N1N-	1.1	A,B,C,D	100, 250
0805NPO1R2_&N1N-	1.2	A,B,C,D	100, 250
0805NPO1R3_&N1N-	1.3	A,B,C,D	100, 250
0805NPO1R5_&N1N-	1.5	A,B,C,D	100, 250
0805NPO1R6_&N1N-	1.6	A,B,C,D	100, 250
0805NPO1R8_&N1N-	1.8	A,B,C,D	100, 250
0805NPO2R0_&N1N-	2.0	A,B,C,D	100, 250
0805NPO2R2_&N1N-	2.2	A,B,C,D	100, 250
0805NPO2R4_&N1N-	2.4	A,B,C,D	100, 250
0805NPO2R7_&N1N-	2.7	A,B,C,D	100, 250
0805NPO3R0_&N1N-	3.0	A,B,C,D	100, 250
0805NPO3R3_&N1N-	3.3	A,B,C,D	100, 250
0805NPO3R6_&N1N-	3.6	A,B,C,D	100, 250

PRESIDIO PART NUMBER	CAP. (pF)	TOL.	WVDC
0805NPO3R9_&N1N-	3.9	A,B,C,D	100, 250
0805NPO4R3_&N1N-	4.3	A,B,C,D	100, 250
0805NPO4R7_&N1N-	4.7	A,B,C,D	100, 250
0805NPO5R1_&N1N-	5.1	A,B,C,D	100, 250
0805NPO5R6_&N1N-	5.6	A,B,C,D	100, 250
0805NPO6R2_&N1N-	6.2	A,B,C,D	100, 250
0805NPO6R8_&N1N-	6.8	A,B,C,D	100, 250
0805NPO7R5_&N1N-	7.5	A,B,C,D	100, 250
0805NPO8R2_&N1N-	8.2	A,B,C,D	100, 250
0805NPO9R1_&N1N-	9.1	A,B,C,D	100, 250
0805NPO100_&N1N-	10	F,G,J,K	100, 250
0805NPO110_&N1N-	11	F,G,J,K	100, 250
0805NPO120_&N1N-	12	F,G,J,K	100, 250
0805NPO130_&N1N-	13	F,G,J,K	100, 250
0805NPO150_&N1N-	15	F,G,J,K	100, 250
0805NPO160_&N1N-	16	F,G,J,K	100, 250
0805NPO180_&N1N-	18	F,G,J,K	100, 250
0805NPO200_&N1N-	20	F,G,J,K	100, 250
0805NPO220_&N1N-	22	F,G,J,K	100, 250
0805NPO240_&N1N-	24	F,G,J,K	100, 250
0805NPO270_&N1N-	27	F,G,J,K	100, 250
0805NPO300_&N1N-	30	F,G,J,K	100, 250
0805NPO330_&N1N-	33	F,G,J,K	100, 250

PRESIDIO PART NUMBER	CAP. (pF)	TOL.	WVDC
0805NPO360_&N1N-	36	F,G,J,K	100, 250
0805NPO390_&N1N-	39	F,G,J,K	100, 250
0805NPO430_&N1N-	43	F,G,J,K	100, 250
0805NPO470_&N1N-	47	F,G,J,K	100, 250
0805NPO510_&N1N-	51	F,G,J,K	100, 250
0805NPO560_&N1N-	56	F,G,J,K	100, 250
0805NPO620_&N1N-	62	F,G,J,K	100, 250
0805NPO680_&N1N-	68	F,G,J,K	100, 250
0805NPO750_&N1N-	75	F,G,J,K	100, 250
0805NPO820_&N1N-	82	F,G,J,K	100, 250
0805NPO910_&N1N-	91	F,G,J,K	100, 250
0805NPO101_&N1N-	100	F,G,J,K	100, 250
0805NPO111_&N1N-	110	F,G,J,K	100, 250
0805NPO121_&N1N-	120	F,G,J,K	100, 250
0805NPO131_&N1N-	130	F,G,J,K	100, 250
0805NPO151_&N1N-	150	F,G,J,K	100, 250
0805NPO161_&N1N-	160	F,G,J,K	100, 250
0805NPO181_&N1N-	180	F,G,J,K	100, 250
0805NPO201_&N1N-	200	F,G,J,K	100, 250
0805NPO221_&N1N-	220	F,G,J,K	100, 250
0805NPO241_&N1N-	240	F,G,J,K	100, 250

For other cap values contact factory. Voltages in **BOLD** are for military and space.

PART NUMBER CODES AND DIMENSIONS

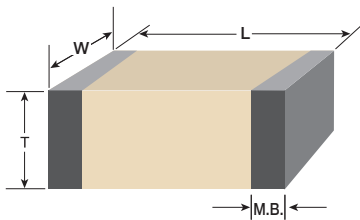

Capacitance Codes for Multilayer Capacitor

First Two Digits = Significant Figures of Capacitance in Picofarads

Third Digit = Additional Number of Zeros

Examples: 0R1 = 0.1 pF 101 = 100 pF
1R0 = 1 pF 102 = 1,000 pF
100 = 10 pF 103 = 10,000 pF

LENGTH (L) INCH (mm)	WIDTH (W) INCH (mm)	THICKNESS (T) INCH (mm)	METALIZATION BAND (M.B.) INCH (mm)
0.080 ± 0.010 (2.03 ± 0.25)	0.050 ± 0.010 (1.27 ± 0.25)	0.055 MAX (1.40 MAX)	0.005 to 0.030 (0.127 to 0.762)

Capacitance Tolerance Codes

Code	Tolerance	Cap Range
A	± 0.05 pF	< 10 pF
B	± 0.1 pF	< 10 pF
C	± 0.25 pF	< 10 pF
D	± 0.5 pF	< 10 pF
E	± 0.5%	≥ 10 pF
F	± 1%	≥ 10 pF
G	± 2%	≥ 10 pF
J	± 5%	≥ 10 pF
K	± 10%	≥ 10 pF
M	± 20%	≥ 10 pF

Termination Codes

Code	RoHS Comp.	Typical Application	Termination Build up	Recommended Reflow Temp.
N	No	Solder Reflow	90% Tin/10% Lead Plated Nickel Barrier Silver Base	220°C to 260°C Typical
T	Yes	Solder Reflow	100% Tin Plated Nickel Barrier Silver Base	220°C to 260°C Typical
P	Yes	Conductive Epoxy	Palladium-Silver Non-Magnetic	Cure Epoxy as per Manufacturer's Spec.

Other terminations available. Please contact factory.

Working Voltage

Code	WVDC
1	25
2	50
3	100
A	150
4	200
&	250

Packaging Codes

1 = Unmarked, Tape & Reel
2 = Laser Marked, Tape & Reel
5 = Unmarked, Waffle Pack
6 = Laser Marked, Waffle Pack
Laser Marking available at extra cost (except 0402 size)

RoHS

Code	Compliant
N	No
C	Yes

Call factory for digital copy of S2P files.

PART NUMBER EXAMPLE (How to Order)

0805	NPO	2R0	B	&	N	1	N	—
Size	Dielectric	Capacitance (2 pF)	Capacitance Tolerance (± 0.1 pF)	Voltage (250V)	Termination (Plated SnPb)	Packaging (Tape & Reel)	Not RoHS Compliant	Design-In Code (optional) (See end of catalog)

Presidio's NPO capacitors can be upscreened to **SPACE LEVEL** testing. Consult the factory for details. Some voltage derating may apply.

MAY 2022