




**HIGH RELIABILITY EXTENDED RANGE  
SURFACE MOUNT CERAMIC CHIP CAPACITORS  
FOR SPACE APPLICATIONS  
SR#M123A SERIES**

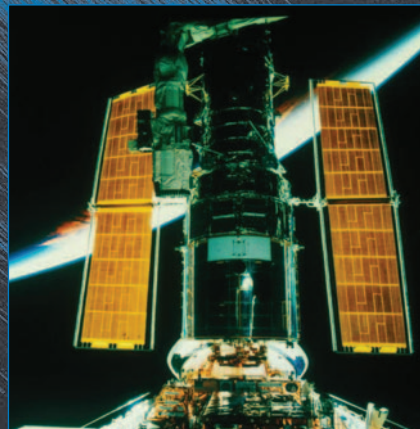

**100% Screened &  
Inspected Similar to  
MIL-PRF-123 Including  
0201 & 0402  
SIZES**

**NEW HIGH  
CAP VALUES  
0201 & 0402**



# SR#M123A SERIES SURFACE MOUNT CERAMIC CHIP CAPACITORS

FORMERLY “#M123 DRAWING”

For space flight applications that require the highest level of reliability, Presidio recommends its high reliability extended range chip capacitors. Tested to the requirements of MIL-PRF-123, Presidio manufactures these chips on the same manufacturing line as its military products. Please note these capacitors are NOT MIL-qualified. Most parts from the SR#M123A series do not meet the MIL-PRF-123 design requirements for dielectric thickness. All parts are manufactured with **PRECIOUS METAL ELECTRODES**.

## NASA S311P829 SPECIFICATION

Most of these chips are available per this most popular NASA drawing. Please click on the NASA S311P829 link on Presidio's website:  
<https://presidiocomponents.com>

## QUALITY ASSURANCE PROVISIONS

Every lot undergoes the following inspection and tests.

### DESTRUCTIVE PHYSICAL ANALYSIS (DPA) — A

representative sample is pulled from each lot and examined per EIA RS469 and to verify adherence to Presidio's design criteria. Sample size is per MIL-PRF-123.

### NON-DESTRUCTIVE INSPECTION — CODE A

Non-Destructive Inspection is performed on 100% of the parts. X-Ray inspection is used for size 0201. Ultrasonic Inspection is used for sizes larger than 0603. X-Ray or Ultrasonic Inspection is used for sizes larger than 0201 up to and including size 0603.

**THERMAL SHOCK** — All parts are temperature cycled for 20 cycles to MIL-STD-202 Method 107, Condition A, except that max temperature is 125°C.

**VOLTAGE CONDITIONING** — All parts receive a voltage conditioning at 2X rated voltage and 125°C for a minimum of 168 hours and a maximum of 264 hours. Voltage Conditioning may be terminated at any time between 168 and 264 hour time interval that failures are less than .1% or 1 piece during the last 48 hours of the test. Method follows MIL-PRF-123. Resistors, instead of fuses are acceptable.

**INSULATION RESISTANCE (IR @ 125°C)** — All parts are tested at 125°C and Rated Voltage in accordance with Method 302 of MIL-STD-202. The minimum IR required is 10,000 Megohms or 100 Megohm-Microfarads.

**DIELECTRIC WITHSTANDING VOLTAGE (DWV)** — All parts are tested at 2.5X rated voltage in accordance with Method 301 of MIL-STD-202.

**INSULATION RESISTANCE (IR @ 25°C)** — All parts are tested at 25°C and Rated Voltage in accordance with Method 302 of MIL-STD-202. The minimum IR required is 100,000 Megohms or 1,000 Megohm-Microfarads.

**CAPACITANCE** — All parts are tested at 25°C and 1VACRMS in accordance with Method 305 of MIL-STD-202.

**DISSIPATION FACTOR (DF)** — See following table:

VOLTAGE RATING	NPO	X7R
Below 16V	0.15%	7.5%
16V	0.15%	5%
25V	0.15%	4%
50V	0.15%	3.5%
> 50V	0.15%	2.5%

**PERCENT DEFECTIVE ALLOWED (PDA)** — The cumulative PDA after Voltage Conditioning is 5%. Pieces rejected as out of tolerance for capacitance or visual screening will be removed from the lot but not counted in the PDA calculation.

**VISUAL** — A 100% inspection is performed IAW MIL-PRF-123 Appendix B.

**MECHANICAL** — Level 1 AQL 1% in accordance with MIL-PRF-123.

**THERMAL SHOCK AND LIFE TEST** — A sample is pulled from each lot. 100 Thermal shock cycles are performed and Life Test is performed for 1000 hours at 2X rated voltage and 125°C. Sample size and method follows MIL-PRF-123.

**HUMIDITY, STEADY STATE, LOW VOLTAGE** — A sample of 12 pieces is pulled from each lot and tested per MIL-PRF-123.

**MARKING (Optional for sizes 0805 and larger only)** — Parts will not be marked unless marking is specified on the PO. If marking is specified, a color letter will be used per Presidio's chip marking system.

## STANDARD PACKAGING

Product will be packaged in individual waffle trays. Tape and reel option is available.

## DATA PACKAGE

Data will be sent with each shipment including:

- CERTIFICATE OF COMPLIANCE
- DPA REPORT
- GROUP A & B ATTRIBUTE DATA SHEET
- LIFE TEST AND HUMIDITY VARIABLES DATA SHEET.

Group B required for flight parts. Parts for engineering models may be subject to lesser screening requirements.

## PART NUMBER EXAMPLE

**SR0402X7R104KENT91(D)#M123A**

PART DESCRIPTION: SR, 0402, X7R, 0.1µF, ±10%, 10V, Plated SnPb Over Ni Termination, Tape & Reel, Design-In Code (D) for Arizona, Screened Similar to MIL-PRF-123 Group A and Group B with 100% Ultrasonic Inspection.


**C OF C AND DATA PACK INCLUDED WITH THE PARTS.**

## HOW TO ORDER

See Back Page for Design-In Codes

EXAMPLE: SR0402X7R104KENT91(D)#M123A

SR	0402	X7R	104	K	E	NT9	1	(D)	#M123	A
Prefix	Size	Dielectric	Capacitance Code	Tolerance Code	Voltage Code	Termination Code	Packaging Code	Design-In Code	Suffix	Non-Destructive Inspection
SR	See Page 3 (Other Sizes Available)	X7R NPO (Other Dielectrics Available including BX, BR, BQ, BP, BG & N2T)	Two significant figures followed by the number of zeros. Example: R05 = 0.05pF OR1 = 0.1 pF 1R0 = 1.0 pF 100 = 10 pF 101 = 100 pF 102 = 1000 pF 103 = .01 µF 104 = .10 µF 105 = 1.0 µF	A = ± .05pF < 10pF B = ± .10pF < 10pF C = ± .25pF < 10pF D = ± .50pF < 10pF E = ± 0.5% ≥ 10pF F = ± 1% ≥ 10pF G = ± 2% ≥ 10pF J = ± 5% ≥ 10pF K = ± 10% L = -10% / +20% M = ± 20% NPO ALL (Contact factory for other tolerances)	I = 4 VDC B = 5 VDC E = 10 VDC F = 12 VDC G = 16 VDC 1 = 25 VDC 2 = 50 VDC 3 = 100 VDC 4 = 200 VDC Other Voltages Available Examples: 63, 75, 150, 250 VDC, etc.	NT9 = Plated SnPb over Ni (4% Pb Min.) C = Plated SnPb over Ni (4% Pb Min.) Flexible base P = PdAg (Thick Film) H = 100% Au (Thick Film) NG* = Plated Au over Ni P & H are non-magnetic *Primarily for legacy parts	1 = Reel, 7", plastic tape, unmarked 2 = Reel, 7", plastic tape, marked 5 = Waffle, unmarked 6 = Waffle, marked Marking Available for Size 0805 & Larger (extra cost)	See Back Page (Optional)	#M123	A = 100%



SIZE	L inches (mm)	W inches (mm)	THICKNESS MAX (T) inches (mm)	METALIZATION BAND (M.B.) inches (mm)	WVDC	DIELECTRIC (Maximum Capacitance)		Available as S-311		Available as M32535
						NPO	X7R	NPO	X7R	X7R
0201	0.024 (0.61) ± 0.003 (0.08)	0.0115 (0.29) ± 0.0015 (0.029)	0.013 (0.33)	.004 (0.10) min. band .008 (0.20) min. space	4 V	N/A	0.022 µF	No	Yes	No
					10 V	100 pF	0.010 µF	Yes	Yes	Yes
0402	0.040 (1.02) +0.006/-0.004 (+0.15/-0.10)	0.020 (0.51) +0.005/-0.004 (+0.13/-0.10)	0.025 (0.63)	.004 (0.10) min. band .015 (0.38) min. space	4 V	N/A	0.22 µF	No	Yes	No
					10 V	390 pF	0.10 µF	No	Yes	Yes
					16 V	200 pF	0.033 µF	No	0.010 µF max.	Yes
					25 V	120 pF	0.033 pF	Yes	4700 pF max.	Yes
					50 V	100 pF	4700 pF	Yes	3900 pF max.	Yes
					100 V	39 pF	4700 pF	Yes	1200 pF max.	Yes
0403	0.040 (1.02) ± 0.010 (0.25)	0.030 (0.76) ± 0.010 (0.25)	0.030 (0.76)	.004 (0.10) min. band .015 (0.38) min. space	10 V	1200 pF	0.047 µF	No	No	N/A
					16 V	560 pF	0.022 µF	No	Yes	N/A
					25 V	390 pF	0.015 µF	Yes	Yes	N/A
					50 V	330 pF	0.012 µF	Yes	Yes	N/A
					100 V	68 pF	2200 pF	Yes	Yes	N/A
0504	0.050 (1.27) ± 0.010 (0.25)	0.040 (1.02) ± 0.010 (0.25)	0.040 (1.02)	.005 (0.13) min. band .015 (0.38) min. space	10 V	2700 pF	0.082 µF	No	No	N/A
					16 V	1800 pF	0.082 µF	No	Yes	N/A
					25 V	1500 pF	0.047 µF	Yes	Yes	N/A
					50 V	1200 pF	0.039 µF	Yes	Yes	N/A
					100 V	180 pF	6800 pF	Yes	Yes	N/A
Low Inductance 0306	0.032 (0.81) ± 0.006 (0.15)	0.063 (1.60) ± 0.006 (0.15)	0.033 (0.84) See Note 1/	.005 (0.13) min. band .010 (0.25) min. space	5 V	N/A	0.10 µF	N/A	Yes	N/A
					16 V		0.10 µF	N/A	Yes	Yes
					25 V		0.022 µF	N/A	Yes	N/A
0603	0.063 (1.60) ± 0.006 (0.15)	0.032 (0.81) ± 0.006 (0.15)	0.035 (0.89)	.005 (0.13) min. band .025 (0.64) min. space	10 V	2200 pF	0.22 µF	No	Yes	Yes
					16 V	1000 pF	0.22 µF	No	0.010 µF max.	Yes
					25 V	680 pF	0.18 µF	Yes	0.027 µF	Yes
					50 V	560 pF	0.022 µF	Yes	Yes	0.018 µF max.
					100 V	100 pF	0.018 µF	Yes	3300 pF max.	Yes
Low Inductance 0508	0.050 (1.27) ± 0.010 (0.25)	0.080 (2.03) ± 0.010 (0.25)	0.045 (1.14) See Note 2/	.005 (0.13) min. band .020 (0.51) min. space	10 V	N/A	0.12 µF	N/A	Yes	N/A
					16 V		0.10 µF	N/A	Yes	N/A
					25 V		0.047 µF	N/A	Yes	N/A
0805	0.080 (2.03) ± 0.010 (0.25)	0.050 (1.27) ± 0.010 (0.25)	0.055 (1.40)	0.020 (0.51) ± 0.010 (0.25)	10 V	4700 pF	1.0 µF	No	Yes	0.10 µF max.
					16 V	3300 pF	0.22 µF	No	Yes	0.10 µF max.
					25 V	2700 pF	0.10 µF	Yes	Yes	Yes
					50 V	2200 pF	0.10 µF	Yes	Yes	Yes
					100 V	560 pF	0.10 µF	Yes	0.022 µF max.	Yes
Low Inductance 0612	0.063 (1.60) ± 0.010 (0.25)	0.126 (3.20) ± 0.010 (0.25)	0.055 (1.40)	.005 (0.13) min. band .025 (0.64) min. space	16 V	N/A	0.27 µF	N/A	Yes	N/A
					25 V		0.22 µF	N/A	Yes	N/A
1206	0.126 (3.20) ± 0.008 (0.20)	0.063 (1.60) ± 0.008 (0.20)	0.065 (1.65)	0.020 (0.51) ± 0.010 (0.25)	10 V	0.012 µF	1.8 µF	No	Yes	Pending
					16 V	8200 pF	0.39 µF	No	Yes	Pending
					25 V	6800 pF	0.27 µF	Yes	Yes	Pending
					50 V	5600 pF	0.22 µF	Yes	Yes	Pending
					100 V	1500 pF	0.10 µF	Yes	Yes	Pending
					200 V	820 pF	0.027 µF	No	No	N/A
1209	0.125 (3.18) ± 0.010 (0.25)	0.095 (2.41) ± 0.010 (0.25)	0.065 (1.65)	0.020 (0.51) ± 0.010 (0.25)	10 V	0.018 µF	2.7 µF	No	Yes	Pending
					16 V	0.012 µF	0.68 µF	No	Yes	Pending
					25 V	0.010 µF	0.47 µF	Yes	Yes	Pending
					50 V	8200 pF	0.39 µF	Yes	Yes	Pending
					100 V	3900 pF	0.15 µF	Yes	Yes	Pending
					200 V	1800 pF	0.068 µF	No	No	N/A
Low Inductance 0912	0.095 (2.41) ± 0.010 (0.25)	0.126 (3.20) ± 0.010 (0.25)	0.065 (1.65)	.005 (0.13) min. band .025 (0.64) min. space	16 V	N/A	0.68 µF	N/A	Yes	N/A
					25 V		0.47 µF	N/A	Yes	N/A
1712	0.175 (4.45) ± 0.015 (0.38)	0.125 (3.18) ± 0.010 (0.25)	0.065 (1.65)	0.020 (0.51) ± 0.010 (0.25)	16 V	0.027 µF	1.2 µF	No	Yes	Pending
					25 V	0.022 µF	1.0 µF	Yes	Yes	Pending
					50 V	0.015 µF	0.68 µF	Yes	Yes	Pending
					100 V	6800 pF	0.27 µF	Yes	Yes	Pending
					200 V	3300 pF	0.12 µF	No	No	N/A
1812	0.180 (4.572) ± 0.015 (0.38)	0.125 (3.18) ± 0.015 (0.38)	0.120 (3.05)	0.020 (0.51) ± 0.010 (0.25)	10 V	N/A	4.7 µF	No	Yes	Pending
1725	0.180 (4.45) ± 0.015 (0.38)	0.250 (6.35) ± 0.018 (0.46)	0.065 (1.65) *0.080 (2.03) For max cap value	0.020 (0.51) ± 0.010 (0.25)	16 V	0.068 µF	3.3 µF	No	Yes	N/A
					25 V	0.056 µF	2.2 µF	Yes	Yes	N/A
					50 V	0.039 µF	2.2 µF	Yes	No	N/A
					100 V	0.018 µF	0.68 µF	Yes	Yes	N/A
					200 V	8200 pF	0.27 µF	No	No	N/A
2225	0.220 (5.59) ± 0.015 (0.38)	0.250 (6.35) ± 0.018 (0.46)	0.080 (2.03)	0.020 (0.51) ± 0.010 (0.25)	16 V	0.082 µF	3.9 µF	No	Yes	Pending
					25 V	0.068 µF	3.3 µF	Yes	Yes	Pending
					50 V	0.056 µF	2.2 µF	Yes	Yes	Pending
					100 V	0.027 µF	1.0 µF	Yes	Yes	Pending
					200 V	0.012 µF	0.47 µF	No	No	N/A

1/ Also available as 0.024 Max Thickness

2/ Also available as 0.020 Max Thickness

LEGEND: High Runners Newly Qualified Parts



# A WORD TO DESIGN ENGINEERS

After the design work is done, outsourcing manufacturing on a global basis is a management option. At Presidio Components, we are striving for complete customer satisfaction which includes “after” service for all of our products.

For quick traceability, if needed, we added a “Design-In” locator code. Please select your location from the list below and add the appropriate code at the end of the part number. If you need assistance give us a call at +1-858-578-9390 or email us at [info@presidiocomponents.com](mailto:info@presidiocomponents.com).

## UNITED STATES

USA	Code	USA	Code
Alabama	G	Nebraska	P
Alaska	P	Nevada, North	B
Arizona	D	Nevada, South	C
Arkansas	P	New Hampshire	L
California, North	B	New Jersey	J
California, South	C	New Mexico	D
Colorado	E	New York, Metro	J
Connecticut	L	New York, Upstate	K
Delaware	I	North Carolina	G
District of Columbia	H	North Dakota	O
Florida	G	Ohio	M
Georgia	G	Oklahoma	P
Hawaii	P	Oregon	A
Idaho	A	Pennsylvania	I
Illinois	N	Rhode Island	L
Indiana	M	South Carolina	G
Iowa	O	South Dakota	O
Kansas	P	Tennessee	G
Kentucky	M	Texas	F
Louisiana	P	Utah	E
Maine	L	Vermont	L
Maryland	H	Virginia	H
Massachusetts	L	Washington	A
Michigan	N	West Virginia	P
Minnesota	O	Wisconsin, East	N
Mississippi	G	Wisconsin, West	O
Missouri	N	Wyoming	E
Montana	A		

## OUTSIDE THE UNITED STATES

Americas	Code	Europe	Code
Canada	R	Austria	3
Mexico	R	Belgium	1
Caribbean	R	Denmark	5
Central America	R	Finland	5
South America	R	France	2
		Germany	3
		Ireland	6
		Italy	4
		Luxembourg	1
		Netherlands	1
		Norway	5
		Sweden	5
		Switzerland	3
		United Kingdom	6
		Other European Countries	7
		<b>Other</b>	
		India	Z
		Israel	8
		Rest of World	9

### PART NUMBER EXAMPLE

**SR0402X7R104KENT91(D)#M123A**

PART DESCRIPTION: SR, 0402, X7R, 0.1µF, ±10%, 10V,  
Plated SnPb Over Ni Termination, Tape & Reel, Design-In Code  
(D) for Arizona, Screened Similar to MIL-PRF-123 Group A and  
Group B with 100% Ultrasonic Inspection.

*C OF C AND DATA PACK INCLUDED WITH THE PARTS.*

## MAIN PRODUCT CATALOGS

*Click Catalog Cover or Scan QR Code to Visit Product Page on Website*




**SURFACE MOUNT  
CERAMIC CHIP  
CAPACITORS**



**HIGH RELIABILITY  
EXTENDED RANGE  
CHIPS FOR SPACE**



**CERAMIC STACKED  
CAPACITORS  
FOR SMPS**



**HIGH TEMPERATURE  
CERAMIC CAPACITORS**



**CERAMIC CAPACITORS  
FOR RF ENGINEERS**



**HIGH Q NPO  
CERAMIC CAPACITORS  
FOR RF & MICROWAVE**



**HIGH VOLTAGE  
RADIAL LEADED  
& MIL-PRF-49467  
CERAMIC CAPACITORS**

Information in  
this document is subject to  
change without notice.



**PRESIDIO COMPONENTS, INC.**

7169 Construction Court, San Diego, CA 92121 • Tel: +1-858-578-9390 • Fax: +1-858-578-6225

[www.presidiocomponents.com](http://www.presidiocomponents.com) • [info@presidiocomponents.com](mailto:info@presidiocomponents.com)

**REV. U  
NOVEMBER 2025**